

**ZEUS** HYDRATECH LTD  
*Global Suppliers of Premium Hydraulic Components*

**Official UK Distributor for Nachi Hydraulic Components**  
T: +44(0)1172 130042. E: [sales@zeushydratech.com](mailto:sales@zeushydratech.com). W: [zeushydratech.com](http://zeushydratech.com)

Energy Saving Solenoid Valves

# SE/SED <sup>NEW</sup> SERIES G01-40 DESIGN

Low power type DIN connector wiring format added to SED series

## Features

- Best in 5W class with maximum working pressure, maximum flow, and allowable back pressure
- CE marking compliant
- Standard terminal boxes/DIN connectors and wired connector (M12-4 pin connector) models available and can be selected with auxiliary model numbers
- Surgeless circuit is standard equipment
- Models with wired connectors can be directly connected to reduced-wiring systems, such as DeviceNet

## 5W class optimal specifications

- Maximum working pressure: 16 MPa
- Maximum flow rate: 40 L/min
- Allowable back pressure: 16 MPa

Surgeless function is originally equipped

Power consumption: 4.8 W

Configuration for low pressure drop

## Easy wiring

- Wired terminal box/DIN connector and wired connector (M12-4 pin connectors) are available
- Selectable with auxiliary symbol



Certified for international safety standards


Nachi brand solenoid valves can be used safely throughout the world.



Surgeless circuit (standard equipment)


Wired terminal box:  
Auxiliary Symbol for relay driving circuit (GR)

Electrical circuit diagram for central terminal box

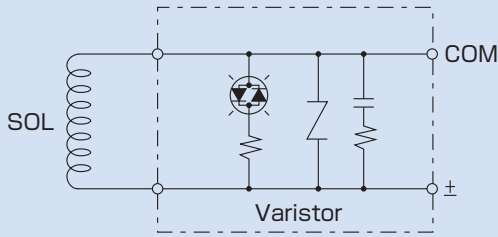

Advantages of wired terminal


- Suitable for the circuit required high response time due to the internal varistor for quick recovery.
- Longer life of contact point with reducing the spark on operating.



Wired to terminal block inside terminal box


Wired connector:  
Auxiliary symbol for sequence drive circuit (GRV)

Electrical circuit diagram for central terminal box

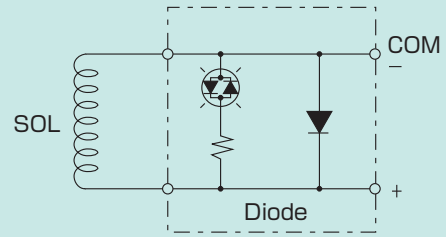

Advantages of wired connector

- Internal diode to prevent reverse surge is built-in. Not necessary to add the protection element for sequencer output (transistor).
- One-touch wiring is possible
- Can be directly connected to reduced-wiring systems, such as DeviceNet



Wired to M12-4 pin connector

Specifications

Item	SE/SED Series G01-40 Design
Maximum working pressure (P, A, and B ports)	16MPa
Maximum flow rate <sup>(Note 1)</sup>	40ℓ/min
Allowable back pressure (T port)	16MPa
Standby power (24 VDC)	4.8W
Dust resistance/water resistance rank	JIS C 0920 IP64(SE-G01), IP65(SED-G01)
International safety standards	In conformity with CE marking

Note 1: Maximum flow varies depending on the operation number, circuit, and operating conditions.

# NACHI

## NACHI-FUJIKOSHI CORP.

www.nachi.com

Toyama Head Office  
Tokyo Head Office

Tel: 076-423-5111  
Tel: 03-5568-5246

NACHI AMERICA INC. HEAD QUARTERS  
NACHI EUROPE GmbH  
NACHI TECHNOLOGY (THAILAND) CO., LTD.  
NACHI SINGAPORE PTE. LTD.  
NACHI (SHANGHAI) CO., LTD.  
FUJIKOSHI-NACHI (MALAYSIA) SDN. BHD.  
NACHI (AUSTRALIA) PTY. LTD.

Tel: +1-317-530-1001  
Tel: +49-(0)2151-65046-0  
Tel: +66-2-714-0008  
Tel: +65-65587393  
Tel: +86-(0)21-6915-2200  
Tel: +60-(0)3-80247900  
Tel: +61-(0)2-9898-1511

http://www.nachiamerica.com/  
http://www.nachi.de/  
http://www.nachi.co.th/  
http://www.nachi.com.cn/  
http://www.nachi.com.au/

●Improvements to specifications may result in unannounced changes.  
●Unauthorized distribution of information in this catalog is prohibited.



Our international sales network covers every jurisdiction. Our global shipping partners mean you can be sure we're on hand whenever you need us.

## **Zeus Hydratech Ltd**

Unit 35  
Old Mills Industrial Estate  
Paulton  
Bristol, BS39 7SU  
United Kingdom

T. +44 (0) 1172 130042  
E: [info@zeushydratech.com](mailto:info@zeushydratech.com)  
W. [www.zeushydratech.com](http://www.zeushydratech.com)